

SCHEDA TECNICA TECHNICAL DATA SHEET

045.D132.R.0.0.0000

Rev. 00

Pg. 1/1

Date

30.03.04

SC. ELETTRONICO ELECTRONIC TIMED DRAIN

Codice

Code

045.D132.R.0.0.0000

Conessioni

Connection

G 3/8" IN - Rp 1/4" OUT

Pressione massima di esercizio


Max. working pressure

16 bar

Temperatura di esercizio

Working temperature

1 ÷ 80 °C

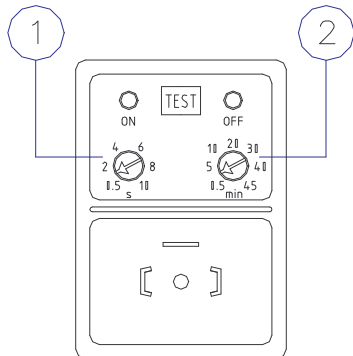


TIMER (Front view)

- TRIMMER 1 - DISCHARGE ENDURANCE [sec] - STANDARD SETTING = 1 sec
- TRIMMER 2 - INTERVAL BETWEEN DISCHARGES [min] - STANDARD SETTING = 1 min

TEMPORIZZATORE (Vista frontale)

- TRIMMER 1 - SCARICO [sec] - TARATURA STANDARD = 1 sec
- TRIMMER 2 - PAUSA [min] - TARATURA STANDARD = 1 min

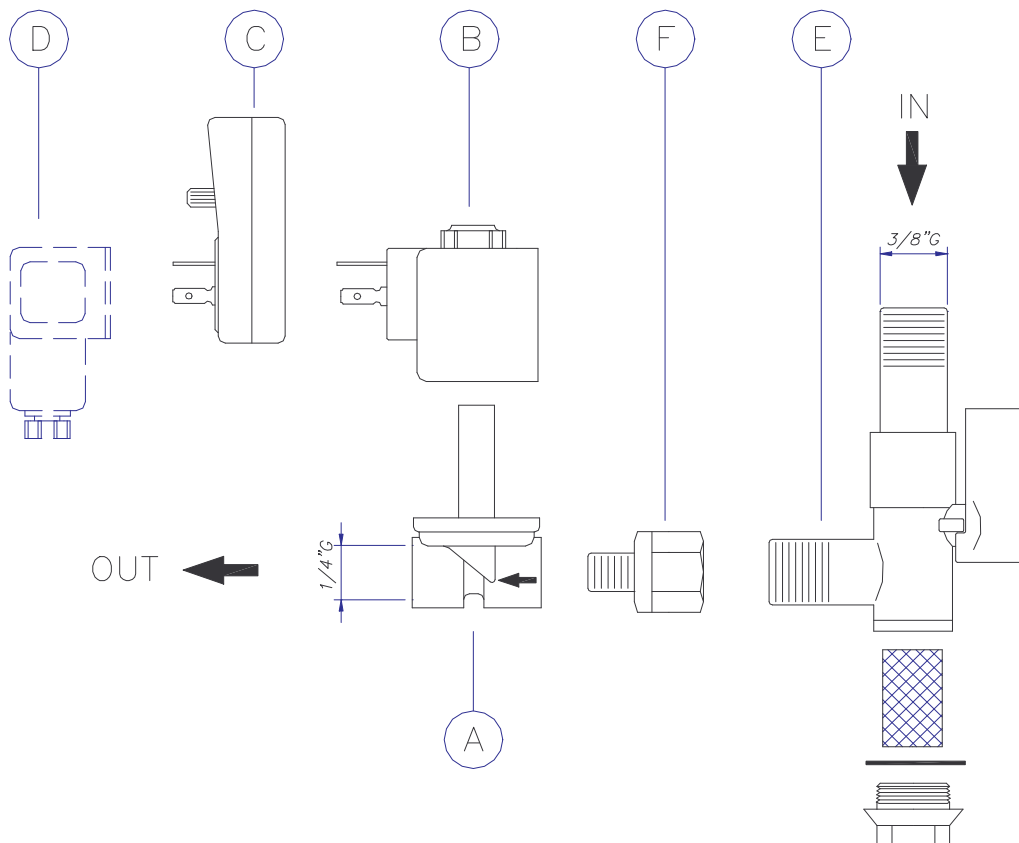

POS.	DESCRIZIONE	DESCRIPTION	CODE
A+B	VALVOLA SCARICO 1/4"	DISCHARGE VALVE 1/4"	240.0108.00.00
B	BOBINA VALVOLA 230V-14Watt	VALVE COIL 230V-14Watt	240.0102.00.00
C	TEMPOR. 24-240V AC/DC	TIMER 24-240V AC/DC	246.0013.00.00
D	CONNET.DIN 43650-A/ISO 4400	CONNECTOR DIN 43650-A/ISO 4400	220.0062.00.00
E	RUBINETTO CON FILTRO 3/8"x3/8"	TAP WITH NET FILTER 3/8"x3/8"	140.0060.00.00
F	PROLUNGA M/F 1/4"x3/8"	REDUCTION NIPPLE M/F 1/4"x3/8"	136.0193.00.00