

SCHEDA TECNICA TECHNICAL DATA SHEET

045.D132.S.0.0.0000

Rev. 0A


Pg. 1/1

Date

02.02.11

SC. ELETTRONICO ELECTRONIC TIMED DRAIN

Codice	Code	045.D132.S.0.0.0000
Conessioni	Connection	G 1/2" IN - Rp 1/4" OUT
Pressione massima di esercizio	Max. working pressure	16 bar
Temperatura di esercizio	Working temperature	1 ÷ 80 °C

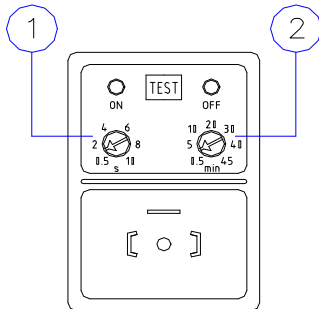


TIMER (Front view)

- TRIMMER 1 - DISCHARGE ENDURANCE [sec] - STANDARD SETTING = 1 sec
- TRIMMER 2 - INTERVAL BETWEEN DISCHARGES [min] - STANDARD SETTING = 1 min

TEMPORIZZATORE (Vista frontale)

- TRIMMER 1 - SCARICO [sec] - TARATURA STANDARD = 1 sec
- TRIMMER 2 - PAUSA [min] - TARATURA STANDARD = 1 min

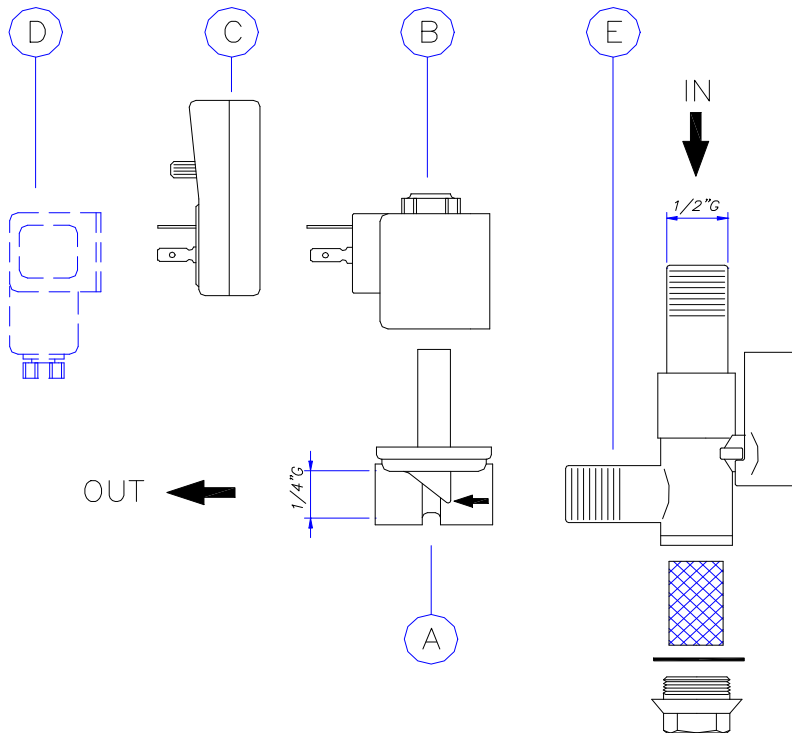

POS.	DESCRIZIONE	DESCRIPTION	CODE
A+B	VALVOLA SCARICO 1/4"	DISCHARGE VALVE 1/4"	240.0108.00.00
B	BOBINA VALVOLA 230V-14 Watt	VALVE COIL 230V-14 Watt	240.0102.00.00
C	TEMPOR. 24-240V AC/DC	TIMER 24-240V AC/DC	246.0013.00.00
D	CONNET.DIN 43650-A/ISO 4400	CONNECTOR DIN 43650-A/ISO 4400	220.0062.00.00
E	RUBINETTO CON FILTRO 1/2"x3/8"	TAP WITH NET FILTER 1/2"x1/4"	140.0100.00.00